

Battery Monitor Kit (BMK)



Kit includes

- Sense module
- DC shunt
50mv/500 amp shunt
- Twisted pair wire
5' length, 18 AWG wire
- Communication cable
10' length, 2-conductor,
telephone standard

MODEL NUMBERS

- ME-BMK

AVAILABLE FOR

- Renewable Energy Systems
Off-grid Power
Back-up Power
- Marine Systems
- RV Systems

WORKS WITH

- ME Series
- MS Series
- MS-AE Series
- RD Series


Monitoring your battery bank is easy with the Battery Monitor Kit (ME-BMK)* from Magnum Energy. Acting as a “fuel gauge” for your batteries, the ME-BMK monitors their state of charge (SOC) and then provides this information in an easy-to-understand display via the ME-RC remote. With accurate SOC readings, you can avoid unnecessary battery recharging, saving on fuel and long-term maintenance costs.

If you already have a Magnum Inverter/Charger and Magnum Remote*, the ME-BMK is an easy retrofit. Simply install the kit according to the installation manual and begin monitoring your battery bank via the “Meter” button on your ME-RC.

Available readings from the ME-BMK

- State of Charge (SOC)
0 - 100%
- DC volts
- DC amps
- Amp hours in/out
- Resettable amp hours out
- Total amp hours out
- Minimum volts DC
- Maximum volts DC
- Temperature compensated
- Auto detects input voltage

ME-BMK Basic Configuration Diagram

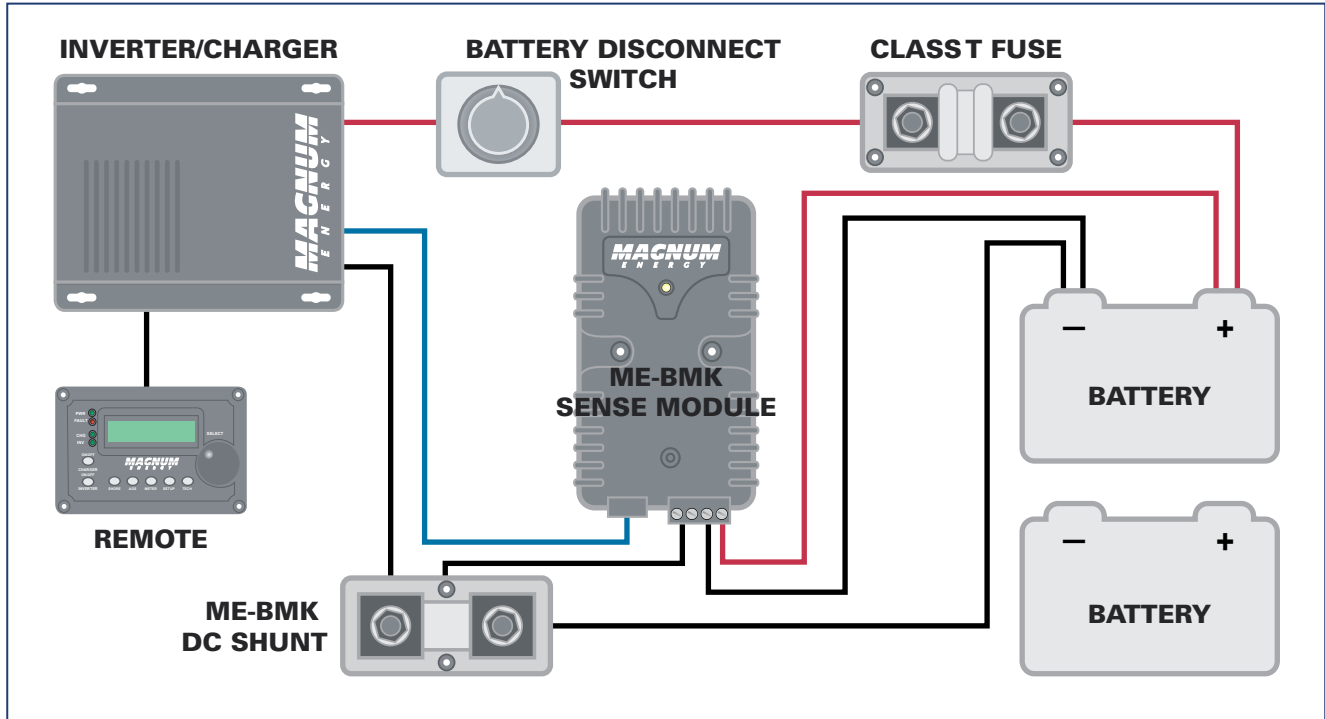

ME-BMK Specifications

| ME-BMK | |
|--|--|
| DC volts | 7 to 70 ($\pm 0.5\%$) auto voltage detection |
| DC amps | ± 0.1 to 999 ($\pm 1.0\%$) |
| Battery SOC % | 0 to 100% (1% increments) |
| Power draw | < .6 watts |
| Amp hours in/out | $\pm 32,768$ amp hours (1 AH increments) |
| rAH out (resettable amp hours removed) | 0 to 65,353 amp hours, resettable (0.1 AH increments) |
| tAH out (total amp hours removed) | 0 to 65,535,000 amp hours (0.1 k or 100 AH increments) |
| Minimum/maximim DC | 7 to 70 VDC, resettable |
| Shipping weight | 2 lb (.9 kg) |
| Kit includes | Manual, sense module, DC shunt, twisted pair wire, and communication cable |
| Sense wire | Twisted pair –blue & orange, 5' length, 18 AWG wire |
| Communication cable | 2-conductor, 10' twisted pair, telephone standard |
| Remote requirements | Use with an ME-RC with firmware revision of 2.0 or higher |

DC Shunt

| | |
|--------------------|--|
| Resistance | 0.1 milliohm (500A at 50mV) |
| Continuous current | 410 amperes maximum |
| Overload current | Overloads to 500 amps for less than 5 minutes if normally operated at less than 300 amps |

Magnum Energy, Inc.
1111 80th Street SW, Suite 250
Everett, Washington 98203 USA

Phone: 425-353-8833
Fax: 425-353-8390
Web: www.magnumenergy.com

Testing for specifications at 25° C
Specifications subject to change without notice.
April 2008, Rev A

**ÉNERGIE
MATRIX
ENERGY**



The Powerful Difference

Part #64-0480

296 Labrosse Avenue, Pointe-Claire, QC, Canada, H9R 5L8
Tel: (514) 630-5630 Toll Free: 1-866-630-5630 Fax: (514) 426-9123
info@matrixenergy.ca www.matrixenergy.ca