




TriStar MPPT™

SOLAR CONTROLLER WITH MAXIMUM POWER POINT TRACKING

Morningstar's **TriStar MPPT** solar controller with TrakStar Technology™ is an advanced maximum power point tracking (MPPT) battery charger for off-grid photovoltaic (PV) systems up to 3kW. The controller provides the industry's highest peak efficiency of 99% and significantly less power loss compared to other MPPT controllers.

The TriStar MPPT features a smart tracking algorithm that maximizes the energy harvest from the PV by rapidly finding the solar array peak power point with extremely fast sweeping of the entire I-V curve. This product is the first PV controller to include on-board Ethernet for a fully web-enabled interface and includes up to 200 days of data logging.

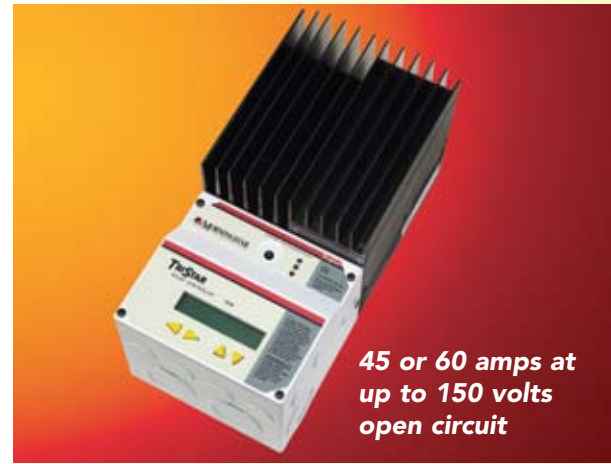

45 or 60 amps at up to 150 volts open circuit

Product shown with optional meter.

Key Features and Benefits

■ Maximizes Energy Harvest

Our TrakStar MPPT Technology features:

- Better peak power point tracking than other MPPT controllers
- Very fast sweeping of the entire I-V curve
- Recognition of multiple power points during shading or mixed PV arrays
- Excellent performance at sunrise and low solar insolation levels

■ Extremely High Reliability

- Robust thermal design and no cooling fans
- Parallel circuit design provides less stress and longer life for electronic components
- No mechanical relays
- Extensive electronic protections including PV short circuit protection
- Epoxy encapsulated inductors and conformally coated printed circuit boards

■ Very High Efficiency

- Peak efficiency of 99%
- Proprietary tracking algorithm minimizes power losses
- Low self-consumption
- Continuous operation at full power to 45°C without need to de-rate
- Selected electronic devices with higher ratings to minimize losses from heating

■ Extensive Networking and Communications Capabilities

Enables system monitoring, data logging and adjustability. Uses open standard MODBUS™ protocol and Morningstar's MS View software.

- Meterbus: communications between compatible Morningstar products
- Serial RS-232: connection to a personal computer
- EIA-485: communications between multiple devices on a bus
- Ethernet: fully web-enabled interface to a local network or internet; view from a web browser or send email/text messages.

■ Metering and Data Logging

- Optional TriStar meter and remote meter provides detailed operating data, alarms and faults
- Three LED's display system status
- Up to 200 days of data logging via meters or communications ports

System Status:

53.60V	28C	54.2A
2867W		MPPT

Data Logging:

Today	Batt	Day: -1	Batt
	46.4 Vmin		47.2 Vmin
Today	Solar	Day: -1	Solar
	58.9 Amax		56.8 Amax
Today	Solar	Day: -1	Solar
	107.2 Vmax		105.5 Vmax

TECHNICAL SPECIFICATIONS

Electrical

	TS-MPPT-45	TS-MPPT-60
• Maximum Battery Current	45 amps	60 amps
• Nominal Maximum Solar Input	12 Volt 24 Volt 48 Volt	600 Watts 1200 Watts 2400 Watts
		800 Watts 1600 Watts 3200 Watts

TS-MPPT-45 and TS-MPPT-60

- Peak Efficiency 99%
- Nominal System Voltage 12, 24, 36 or 48 volts DC
- Max. Solar Open Circuit Voltage 150 volts DC
- Battery Operating Voltage Range 8-72 volts DC
- Maximum Self-consumption 2.7 Watts
- Transient Surge Protection 4500 Watts/port

Electronic Protections

- Solar: Overload, Short Circuit, High Voltage
- Battery: High Voltage
- High Temperature
- Lightning and Transient Surges
- Reverse Current at Night

Battery Charging

- Charging algorithm 4-stage
- Charging stages Bulk, Absorption, Float, Equalize
- Temperature Compensation
 - Coefficient -5mV/°C/cell (25° ref)
 - Range -30°C to +80°C
 - Set points Absorption, Float, Equalize, HVD


Note: Remote Temperature Sensor is included.

Mechanical

- Dimensions 29.1 x 13.0 x 14.2 cm
11.4 x 5.1 x 5.6 inch
- Weight 4.2 kg / 9.2 lbs.
- Max. Wire Size 35 mm² / 2 AWG
- Conduit knockouts M20; ½, 1, 1 ¼ inch
- Enclosure Type 1 (indoor and vented)
IP20

Environmental

- Ambient Temperature -40°C to +45°C
- Storage Temperature -55°C to +100°C
- Humidity 100% non-condensing
- Tropicalization Epoxy encapsulation
Conformal coating
Marine rated terminals

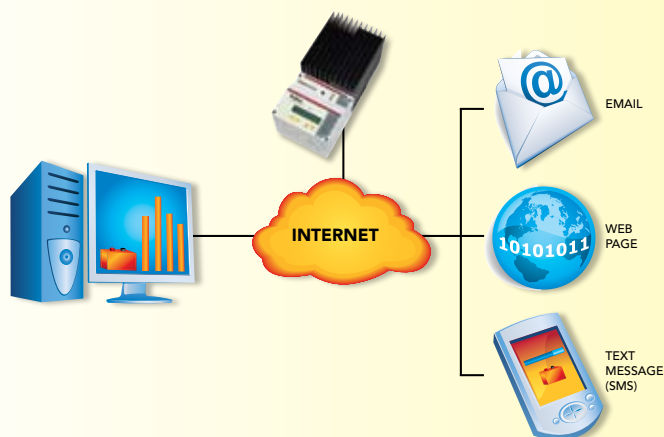

Communication Ports

	TS-MPPT-45	TS-MPPT-60
• MeterBus	Yes	Yes
• RS-232	Yes	Yes
• EIA-485	No	Yes
• Ethernet	No	Yes

Options

- TriStar Meter-2 (TS-M-2)
- TriStar Remote Meter-2 (TS-RM-2)
- Meter Hub (HUB-1)
- Relay Driver (RD-1)

Certifications

- CE Compliant
- ETL Listed (UL1741)
- cETL (CSA C22.2 No. 107.1-01)
- FCC Class B Part 15 Compliant
- Complies with (NEC) U.S. National Electric Code
- RoHS Compliant
- Manufactured in a certified ISO 9001 facility

WARRANTY: Five year warranty period. Contact Morningstar or your authorized distributor for complete terms.



296 Labrosse Avenue, Pointe-Claire, QC, Canada, H9R 5L8
Tel: (514) 630-5630 Toll Free: 1-866-630-5630 Fax: (514) 426-9123
info@matrixenergy.ca www.matrixenergy.ca



8 Pheasant Run
Newtown, PA 18940 USA
Tel: +1 215-321-4457 Fax: +1 215-321-4458
E-mail: info@morningstarcorp.com
Website: www.morningstarcorp.com

